


EXTENDED routing for DV4mini

1

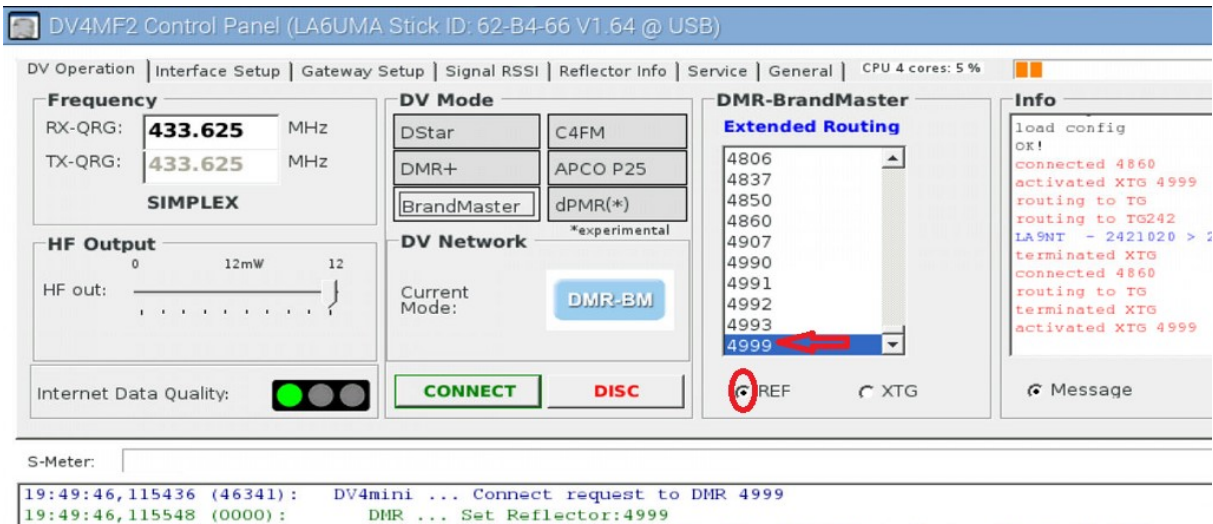

DV4MF2 Control Panel (LA6UMA Stick ID: 62-B4-66 V1.64 @ USB)

DV Operation | Interface Setup | Gateway Setup | Signal RSSI | Reflector Info | Service | General | CPU 4 cores: 5%

Frequency
RX-QRG: 433.625 MHz
TX-QRG: 433.625 MHz
SIMPLEX

HF Output
0 12mW 12
HF out: [Slider]

DV Mode
DStar C4FM
DMR+ APCO P25
BrandMaster dPMR(*)
*experimental

DV Network
Current Mode: DMR-BM
CONNECT DISC

DMR-BrandMaster
Extended Routing
4806
4837
4850
4860
4907
4990
4991
4992
4993
4999 (highlighted with red arrow)


Info
load config OK!
connected 4860
activated XTG 4999
routing to TG
routing to TG242
LA9NT - 2421020 >
terminated XTG
connected 4860
routing to TG
terminated XTG
activated XTG 4999

S-Meter: [Progress bar]

```
19:49:46,115436 (46341): DV4mini ... Connect request to DMR 4999
19:49:46,115548 (0000): DMR ... Set Reflector:4999
```

I ControlCenterDV4M/ DV4MF2 kobler du deg til reflector 4999

2

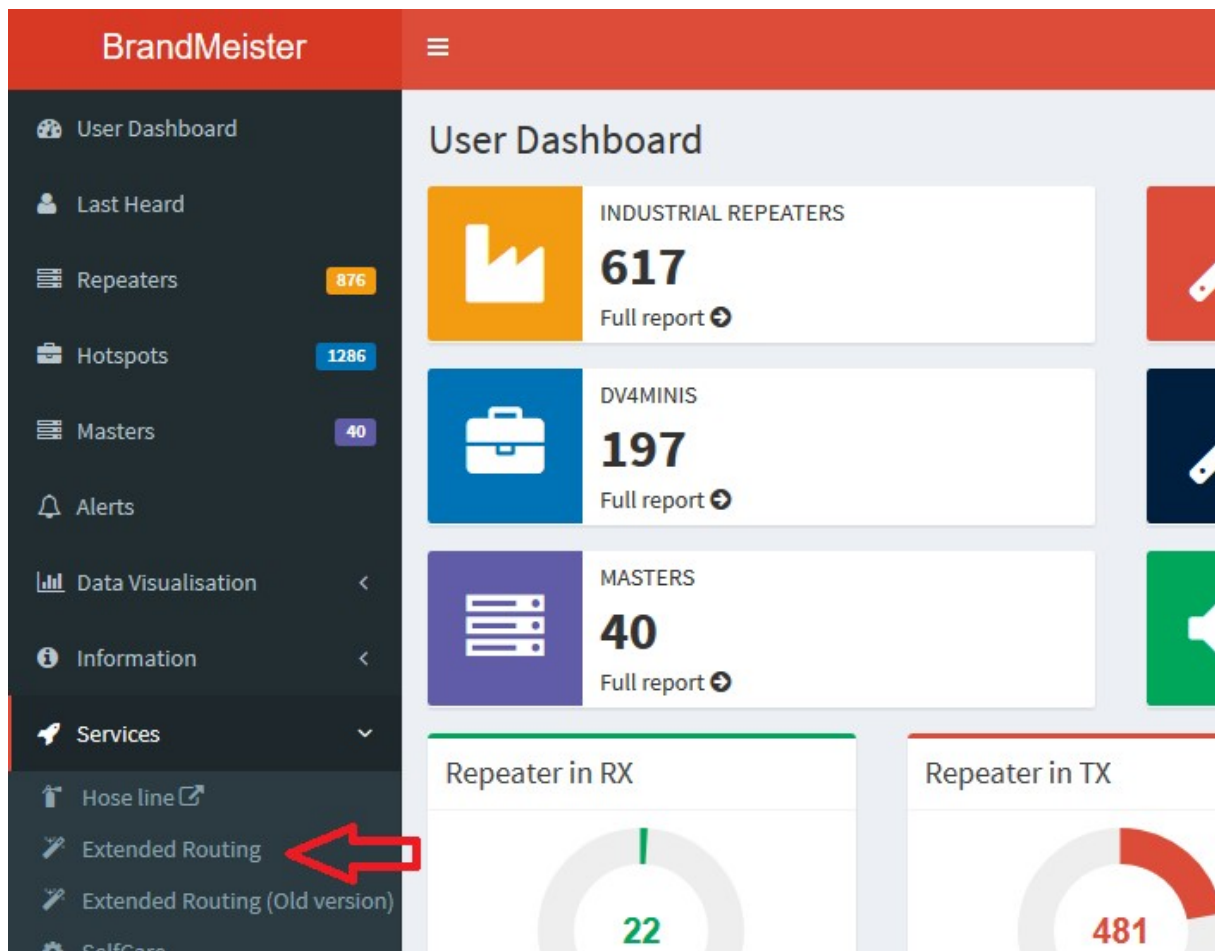

BrandMeister

User Dashboard

- INDUSTRIAL REPEATERS: 617 (Full report)
- DV4MINIS: 197 (Full report)
- MASTERS: 40 (Full report)

Repeater in RX: 22


Repeater in TX: 481

Services menu items:
Hose line
Extended Routing (highlighted with red arrow)
Extended Routing (Old version)
SelfCare

Gå til <https://brandmeister.network/?page=xtg>

Trykk på "Extended Routing" – Dersom du ikke har registrert deg, se neste punkt.

3

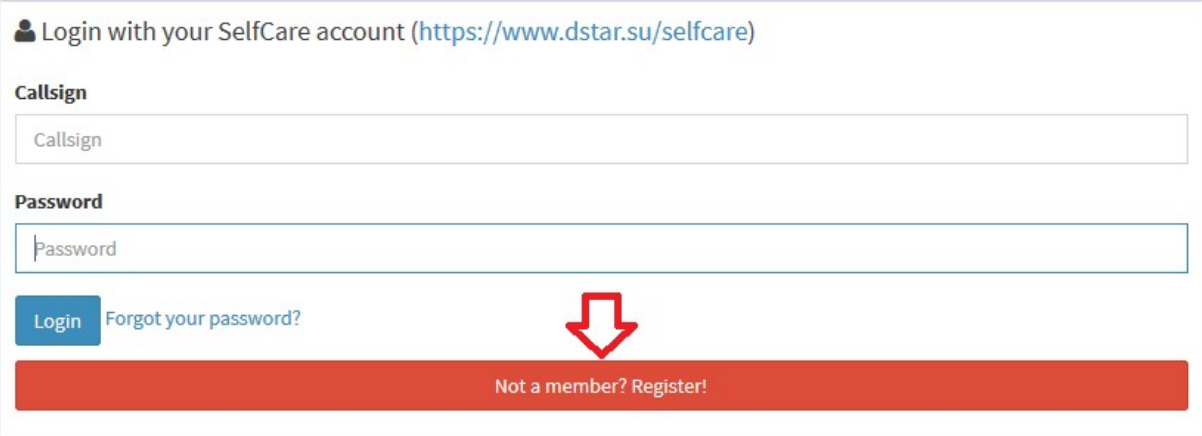


Login with your SelfCare account (<https://www.dstar-su/selfcare>)

Callsign


Password

[Forgot your password?](#)



Not a member? Register!

Login med Callsign og Password, eller trykk på "Not a member? Register!" dersom du ikke er registrert.

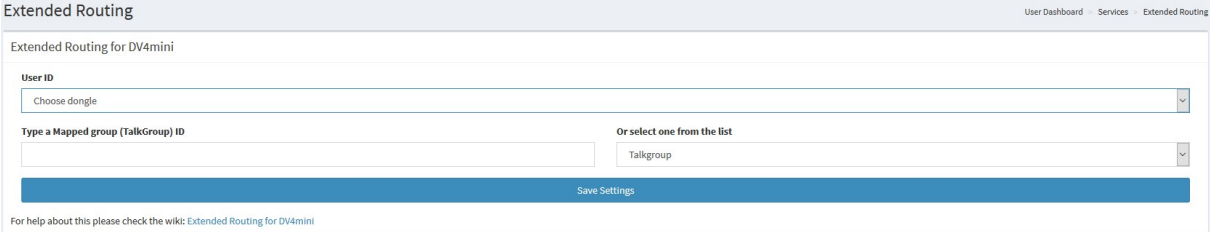

Extended Routing User Dashboard - Services - Extended Routing


Extended Routing for DV4mini

User ID

Type a Mapped group (TalkGroup) ID **Or select one from the list**

For help about this please check the wiki: [Extended Routing for DV4mini](#)

Når du kommer videre kommer dette bildet opp.

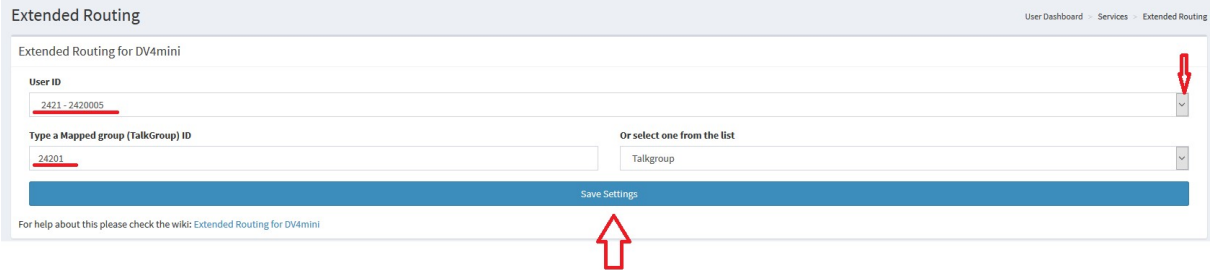


Extended Routing User Dashboard - Services - Extended Routing

Extended Routing for DV4mini

User ID

Type a Mapped group (TalkGroup) ID **Or select one from the list**

For help about this please check the wiki: [Extended Routing for DV4mini](#)



Dersom du har registrert deg riktig kan du velge din CCS7 i fra "User ID" fra rullgardinmenyen. Velg deretter hvilken talegruppe du vil kobles til i "Type a Mapped Group (TalkGroup) ID. I dette tilfelle TG 24201 - National casual/ragchew. Avslutt med "save settings" og du vil få en bekreftelse i form av en grønn linje øverst i bildet "Saved". DV4mini er nå rutet mot TG 24201.

Se de forskjellige talegruppene her: <https://wiki.brandmeister.network/index.php/Norway#TS1>
Engelsk manual: https://wiki.brandmeister.network/index.php/Extended_routing_for_DV4mini